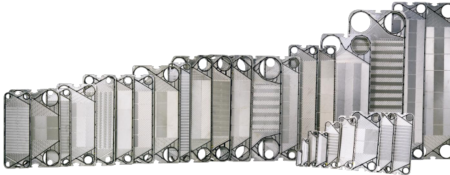
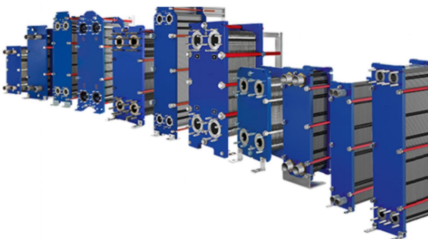

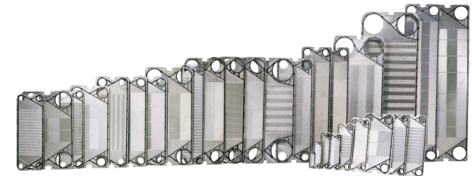

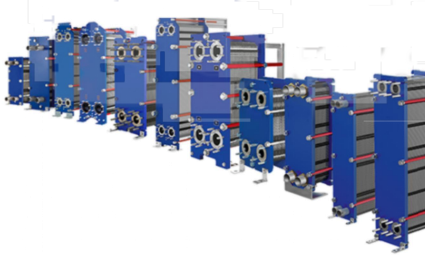

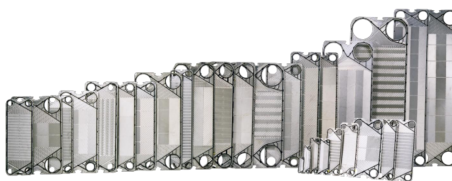

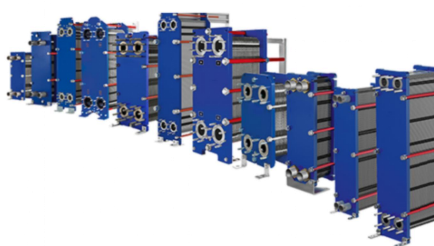





Alfa laval					APV			
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
M3	φ29	357*60	429*125		T4	φ32	381*70	450*140
M6B	φ59	640*140	749*249		H12	φ74	620*150	738*266
M6M	φ58	640*140	747*248		H12	φ74	620*150	740*271
M6MX	φ58	640*140	747*248		H17	φ74	800*150	921*271
M10B	φ97	719*223	874*373		N25	φ85	793.4*238	930*373
M10M	φ98	719*223	871*371		N35	φ85	1069.4*238	1206*373
M15E	φ139	1294*298	1500*499.5		N50	φ85	1483.4*238	1620*373
M15B	φ140	1294*298	1498*497		N35	φ85	1069.4*238	1202*371
M15M	φ140	1294*298	1498*496		Q030E	φ114	743*310	920*496
MX25M	φ230	1939*439	2247*745		Q055E	φ114	1238*310	1415*496
MX25B	φ230	1939*439	2248*746		Q080E	φ114	1757*310	1934*496
M30	φ328	1842*596	2245*995		Q030D	φ112	743*310	920*492
MA30S		1811*561	2232*980		Q055D	φ112	1238*310	1415*492
MA30M		1811*561	2242*992		Q080D	φ112	1757*310	1934*492
M6MW	φ58	640*140	748*247		A055	φ150	1057*380	1271*595
M10BW	φ100	719*223	874*374		A085	φ150	1531*380	1745*595
MK15BW	φ140	1044*298	1248*498		A145	φ150	2479*380	2693*595
T20MW	φ204	1478*353	1745*620		J060	φ229	915*465	1192*746
MA30W	φ330	1811*561	2244*995		J092	φ229	1290*465	1567*746
AM10	φ100	1046*290	1241*486		J107	φ229	1477.5*465	1755*746
A10B	φ100	703*234	871*388		J154	φ229	2040*465	2317*746
A15B	φ160	1315*350	1552*587		J185	φ229	2415*465	2692*746
AM20B	φ210	1450*365	1750*666		M060	φ229	915*465	1190*747
A20B	φ210	1550*430	1836*716		M092	φ229	1290*465	1565*747
AM20	φ200	1450*365	1743*662		M107	φ229	1477.5*465	1753*747
AK20	φ210	931.5*365	1215*664		SRI	φ34	490.5*131	570*210

Alfa laval				APV				
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
AX30B	φ285	1837*540	2205*906		SR2	φ63.5	700*180	838*298
AX30BW	φ285	1837*540	2206*907	 	SR3	φ73.9	1022*262	1152*392
Clip6	φ51	859*130	997*243		R5	φ101.4	1397*257	1556*420
Clip8	φ78	1095*220	1244*369		SR6GL	φ102	1256*314	1418*476
Clip10	φ104	1324*324	1495*493		SR6AG	φ102	1891*314	2053*476
Clip15	φ150	1524*400	1746*619		SR6AA	φ102	2102*314	2264*476
P16	φ32	357*60	427*123		R8GI	φ148	1525*334	1737*546
P26	φ70	592*135	710*248		SR9	φ200	1472*372	1745*645
P36	φ120	946*226	1124*400		R10	φ197	1684*432	1986*712
T2B	φ21	298*50	351*102		R14	φ252.7	1792*515	2122*846
TL3B	φ29	668*60	750*124		SR14AP	φ300	1523*486	1879*853
TL6B	φ65	1036*140	1149*249		SR14AG	φ300	1283*486	1639*853
TS6M	φ68	380*203	509*329		SR14GD	φ300	1043*486	1399*853
TL10B	φ109.5	1338*218	1499*373		B063	φ300	1043*486	1414*854
TL10P	φ105	1338*218	1500*375		B110	φ300	1523*486	1894*854
TL15B	φ155	2035*288	2250*498		B134	φ300	1763*486	2134*854
T20M	φ205	1479*353	1745*620		B158	φ300	2003*486	2374*854
T20B	φ209	1478*353	1749*623		B205	φ300	2483*486	2854*854
T20P	φ214	1478*353	1748*622		P105	φ336	1339*570	1746*984
TS20M	φ195	698.5*363	961*621		P190	φ336	2137*570	2544*984
T20S	φ168	1478*353	1740*616		TR9AL	φ200	2329*409	2591*670
TL35S	φ348	2178*578	2591*991		TR9AV	φ200	1897*409	2159*670
TL35B	φ350	2177*578	2598*998		TR9GN	φ200	1465*409	1727*670
T45M	φ420	2468*720	2996*1245		TR9GL	φ200	1033*409	1295*670
T50M	φ499	2816*765	3396*1348		R55	φ119	1237.5*310	1414*491
TS50M	φ499	2166*765	2746*1348		K34	φ115	832.5*310	1010*487
AC400			1835*489		K55	φ115	1237.5*310	1415*487
AC600			2236*738		K71	φ115	1552.5*310	1730*487

TRANTER					SONDEX			
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
GC008	φ30	640*60	715*125		S4A	φ28	381*70	449*140
GC009	φ40	555*100	648*188		S8A	φ28	656*70	724*140
GL13	φ67	592*135	714*250		S7A	φ60	394*126	498*230
GX4	φ67	308.5*135	431*250		S14A	φ60	694*126	798*230
GX12	φ67	592*135	714*250		S20A	φ60	894*126	998*230
GX18	φ67	822*135	941*248		S7	φ62	394*126	498*232
GC16	φ55	592*135	700*250		S20	φ62	894*126	998*232
GC26	φ105	779*226.5	941*384		S16B	φ60	640*140	752*252
GX26	φ105	779*226	942*385		S9A	φ66	380*192	496*306
GX42	φ105	1189*226	1352*385		S19A	φ66	700*192	816*306
GC50	φ72	592*135	706*249		S31A	φ66	1050*192	1166*306
GX51	φ145	1143*300	1354*507		S17	φ69	800*150	927*274
GC51	φ145	1143*300	1352*505		S21	φ100	719*225	871*380
GC60	φ216	910*420	1196*700		S21A	φ100	719*225	871*380
GX60	φ194	910*420	1196*704		S22	φ95	719*225	882*378
GX100	φ194	1490*420	1776*704	 	S23	φ85	656.5*238.5	792*372
GX140	φ194	2070*420	2356*704		S37	φ81	1071*238	1212*380
GX64	φ152	1320*285	1552*506		S35	φ146	800*284	992*479
GX91	φ152	1800*285	2032*506		S50	φ100	1450*202	1600*354
GX118	φ152	2280*285	2512*506		S30	φ100	950*202	1100*354
GX85	φ294	1140*570	1528*942		S41	φ147	890*296	1100*500
GX145	φ294	1720*570	2108*942		S41A	φ147	890*296	1100*500
GX205	φ294	2300*570	2688*942		S42	φ147	890*296	1099*499
GL230	φ458	2090*700	2672*1253		S63	φ148	1292*296	1501*499
GL330	φ458	2700*700	3282*1253		S43H	φ197	791*395	1054*660

VICARB					SONDEX			
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
V2	φ20	298*50	350*102		S43A	φ202	791*395	1058*657
V4	φ30	430*62	500*125		S43	φ202	791*395	1058*656
V8	φ49	554*100	640*188		S65	φ202	1091*395	1358*656
V13	φ70	625*130	739*241		S100	φ202	1489*395	1756*657
V20	φ70	875*130	989*241		S47	φ100	1365*225	1518*380
V28	φ100	882*234	1052*393		S64	φ100	1771*225	1924*380
V45	φ100	1302*234	1472*393		S81	φ303	1080*480	1464*868
V60	φ155	1280*310	1510*540		S121	φ303	1490*480	1874*868
V100	φ155	2000*310	2230*540		S188	φ303	2120*480	2504*868
V110	φ300	1320*598	1700*978		S62	φ147	1292*296	1502*500
V130	φ255	1650*480	1980*810		S86	φ147	1694*296	1904*500
V170	φ400	1681*700	2181*1200		S110	φ147	2094*296	2304*500
V280	φ400	2492*700	2992*1200		S113G	φ250	1527*448	1846*758
GERMANY					SF123	φ196	1842*350	2196*686
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		SF160	φ292	1916*556	2352*1012
NT150S	φ155	1092*314	1324*541		S43	φ213	791*395	1053*657
NT250S	φ250	1406*420	1736*745		S65	φ213	1091*395	1353*657
NT250M	φ250	1703*420	2033*745		S100	φ213	1489*395	1751*657
NT250L	φ250	2000*420	2330*745		S130	φ213	1891*395	2153*657
NT350S	φ348	1692*559	2140*995		SFD13	φ74	620*150	744*270
NT350M	φ348	2029*559	2477*995		SFD22			952*320
NH350S	φ348	1693*559	2138*995		SFD23	φ85	656.5*238.5	792*370
NH350M	φ348	2030*559	2475*995					
A184	φ194	1526*404	1759*665					
N40	φ120	1227*257	1406*432					

GERMANY				Schmidt				
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
VT04	φ32	480*61	550*129		Sigma09	φ30	704*90	794*159
VT10	φ50	691*118	780*212		Sigma13	φ70	590*135	710*250
VT20	φ79	868*212	999*337		Sigma26	φ72	981*174	1116*304
VT205	φ78	869*212	994*339		Sigma27	φ72	980*174	1117*305
VT20P	φ75	868*212	999*338		Sigma36	φ88	1076*218	1230*364
VT40	φ113	1227*257	1400*425		Sigma37	φ88	1076*218	1231*365
VT40(M)	φ115	1227*257	1400*424		Sigma48	φ195	1078*340	1364*592
VT405P	φ118	855*257	1027*430		Sigma49X(39 X)	φ110	944*272	1129*440
AT405	φ111	855*257	1024*429		Sigma25	φ110	710*272	894*440
VT405	φ117	855*257	1021*429		Sigma35	φ110	944*272	1128*440
VT80	φ175	1526*382	1766*614		Sigma25	φ110	710*272	894*440
VT80(M)	φ175	1526*382	1766*614		Sigma35	φ110	944*272	1128*440
VT2508	φ450	1957*695	2492*1214		Sigma55	φ110	1334*272	1518*440
NT25M	φ28	481*61	552*128		Sigma85	φ137	1928*290	2135*498
NT50T	φ56	371*130	492*246		Sigma56	φ215	1048*325	1333*600
NT50M	φ56	743*130	864*246		Sigma76	φ215	1423*325	1708*600
NT50X	φ56	1115*130	1236*246		Sigma96	φ215	1798*325	2083*600
NT100T	φ110	707*262	897*445		Sigma66	φ138	1470*290	1679*498
NT100M	φ110	1113*262	1303*445		Sigma106	φ227	1675*425	1972*722
NT100X	φ110	1519*262	1709*445		Sigma136	φ227	2081*425	2378*722
NT150L	φ155	1572*314	1804*541		Sigma156	φ340	1835*560	2250*975
Funke					Sigma90			1795*967
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)					
FP08	φ30	675*65	733*122					
FP05	φ29	381*70	449*140					
FP09	φ29	676*70	744*140					

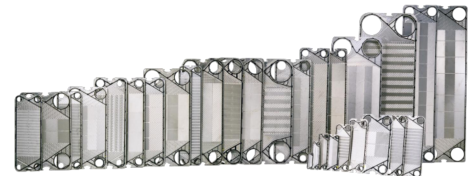Funke					Thermowave			
Model	Corner hole diameter (mm)	Corner hole center distance	Dimensions (mm)		Model	Corner hole diameter (mm)	Corner hole center distance (mm)	Dimensions (mm)
FP10	φ57	494*126	598*230		TL50P	φ43	363*125	519*244
FP16	φ57	694*126	798*230		TL90P	φ43	565*125	721*244
FP22	φ57	894*126	998*230		TL150P	φ43	825*125	981*244
FP205	φ100	719*225	880*381		TL90S	φ43	565*125	721*244
FP31	φ100	894*225	1055*381		TL150S	φ43	825*125	981*244
FP40	φ100	1141*225	1302*381	 	TL200P	φ84.6	620*212	796*369
FP50	φ100	1388*225	1548*381		TL400P	φ84.6	1208*212	1384*369
FP71	φ100	1882*225	2042*381		TL200S	φ85	620*212	796*369
FP41	φ150	941.5*290	1156*505		TL400S	φ85	1208*212	1384*369
FP60	φ150	1306*290	1521*505		TL250P	φ107	774*256	1014*438
FP80	φ150	1671*290	1886*505		TL500P	φ107	1256*256	1496*438
FP42	φ148	941.8*290	1156*506		TL250S	φ107	774*256	1014*438
FP62	φ148	1306.9*290	1521*506		TL500S	φ107	1256*256	1496*438
FP82	φ148	1672*290	1886*506		TL250SSW	φ107	774*256	1014*438
FP112	φ148	2158.8*290	2373*506		TL500SSW	φ107	1256*256	1496*438
FP405	φ200	771*395	1040*660		TL650P	φ206	1153*305	1495*586
FP70	φ200	1131*395	1400*660		TL850P	φ206	1693*305	2035*586
FP100	φ200	1491*395	1760*660		TL650S	φ206	1153*305	1495*586
FP130	φ200	1851*395	2120*660		TL850S	φ206	1693*305	2035*586